

Eaton STS 16



Eaton STS 16

Source transfer system

Power supply redundancy for single-connection circuit equipment.

With the Eaton STS 16, power from 2 independent sources can be supplied to servers and circuit equipment which only have one input power supply.

Redundancy

Only advanced servers are equipped with a dual electrical power supply. A majority of network devices and entry-level servers are single connection which means that they only have one electrical power input. With the Eaton STS, every critical equipment can be connected to a redundant power supply.

Both sources (primary and secondary) are connected, in a very straightforward manner, to the STS in the base of the rack.

The Eaton STS then controls the redundancy of this electrical power supply.

Both sources (primary and secondary) are connected, in a very straightforward manner, to the STS in the base of the rack. The Eaton STS then controls the redundancy of this electrical power supply. If the primary source fails, transfer to the secondary source is automatic and instantaneous.

Simple and cost-effective

Considering its advanced design, the price of the Eaton STS is highly competitive compared with the 'dual power supply' options available from suppliers of computer equipment.

1U high, the unit can be installed easily within the rack. Five LEDs indicate the status of the sources and the Eaton STS.


Reliability

Designed to provide redundancy as close as possible to the equipment, the Eaton STS deploys a 'break before make' technology based on relays:

- In the event of a short-circuit, the Eaton STS ensures that the fault cannot affect the alternative source, so that power continues to be supplied to the fault-free equipment
- Power is transferred without overlap of the sources in order to prevent any node of reliability
- Even if it suffers a fault, the Eaton STS continues to supply power to the equipment from the remaining available source



- 1 Buzzer stop
- 2 Fault indicator
- 3 Select primary source

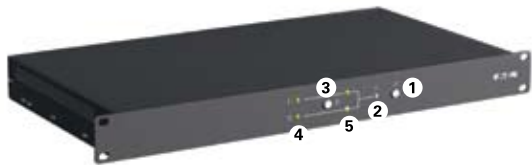

STS 16, front view

- 4 Status of the sources
 - source OK
 - source failed
- 5 Eaton STS output
 - power supplied via the primary source
 - supplied via the secondary source

- 1 Circuit breakers
- 2 Output
- 3 Input



STS 16, rear view

Technical Specifications

| | STS 16 |
|---|--|
| Nominal current | 16 A |
| Compatibility | With all uninterruptible power supplies which use on-line double conversion technology |
| Input/output | |
| Voltage/input frequency | 208/220/230/240 V +/- 12% ; 50/60 Hz |
| Output protection | 1 thermal cutout per set of IEC 13 connectors |
| Performance | |
| Transfer time | 6 ms |
| Technical standards | |
| Safety | EN 50091-1 |
| EMC | EN 50022/B, IEC 1000-4 |
| Marking | CE, TÜV/GS/UL |
| Connection | |
| Inputs | 2 connecting cables with IEC C20 connector (16 A male connector) |
| Outputs | 2 set of 3 IEC C13 connectors - 1 set of 1 IEC C19 connector |
| Dimensions and weight | |
| Dimensions H x W x D | 430 x 43 x 250 mm |
| Weight | 5 kg |
| Customer Service & Support | |
| 2 years guarantee | Standard exchange of the product |
| Communications software and hardware | |
| A simple and complete mimic diagram | Displays the various status of the sources and the Eaton STS |
| An 'STS COM' communication port | Of the dry contact type indicates the status of the sources and the Eaton STS: primary source, source OK, fault within the Eaton STS |

Part Numbers

| | STS 16 |
|---|--------|
| STS 16 | 66 028 |
| Set of two 16 A connecting cables IEC female connector / USE-DIN male connector length 1.5m | 66 397 |
| 1 cable / IEC 10 A male to IEC 16 A female | 66 029 |

